

 **ANEETA Sashless Insert****Key Features**

Air ventilation and security when specifying doors is an area where Aneeta Windows is able to provide a solution for the architect, specifier and home owner.

By fitting a sashless window system directly into the door, the door may be locked, providing the security. The sashless window can also be locked in the partially opened position to provide the ventilation requirement.

This system dismisses the requirement of having a separate fly/insect door as these easily attach over the sashless window insert. This one door system is extremely popular and Aneeta Windows now complete full apartment projects where each bedroom has a sashless window insert in the door.

Other benefits include:

An opening window in a door.

Easy to attach a flyscreen over the sashless unit.

Doors kept locked at night.

Components are noncorrosive and simple to maintain

Provides ventilation in a secure door system.

No flapping of doors in the wind.

No need for a separate fly door (saves room and money).

Very slim line - fits into commercial grade aluminium doors without modification

Install in one leaf of bi-folding door sets so ventilation can be gained without opening any doors.

Aneeta Sashless Inserts are available in 6mm, 10mm and 16mm IGU's in many different configurations.



Phone Assistance
Call 02 9833 0855



Online Technical
www.evolutionwindows.com.au

ANEETA Sashless Insert



WERS


Single Glazed

Glass Type	Uw	SHGCw
6.38 VLam	6.8	0.69
6.38 CP	5.1	0.44
6 SNClr	5.5	0.51
6 EVanGry	6.8	0.49

Double Glazed

Glass Type	Uw	SHGCw
4/10/4	4.4	0.64
4 SNClr/10/4	4.2	0.56
6.38 CPClr/8 AR/4	3.9	0.47
6.38 CPGry/8/4	3.7	0.56

Some of the WERS rated glass and frame combinations for this system. For a complete list of all rated glass and frame combinations refer to our WERS chart.

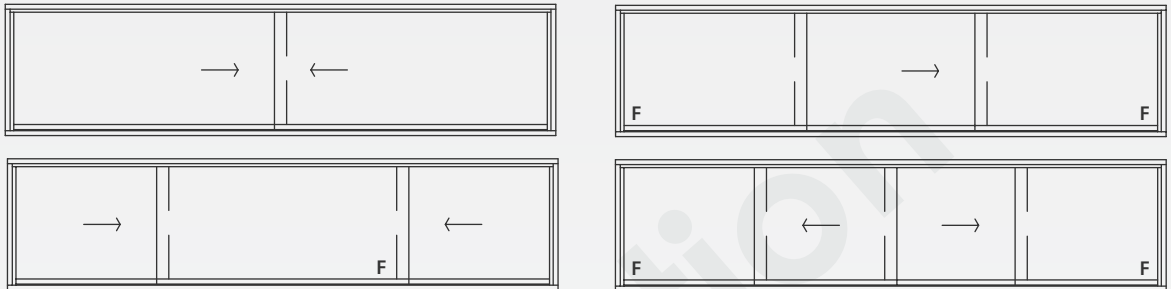


6mm glass - height from 250 to 1200, width from 450 to 5000+

10mm glass - height from 250 to 1800+, width from 450 to 5000+

Sizes are dependent on type of glass and job location (see N rating sizing chart)

Please contact Aneeta re: suitability of window size, type and application

NOTE: Suitable for very exposed locations (up to 400pa water rating)

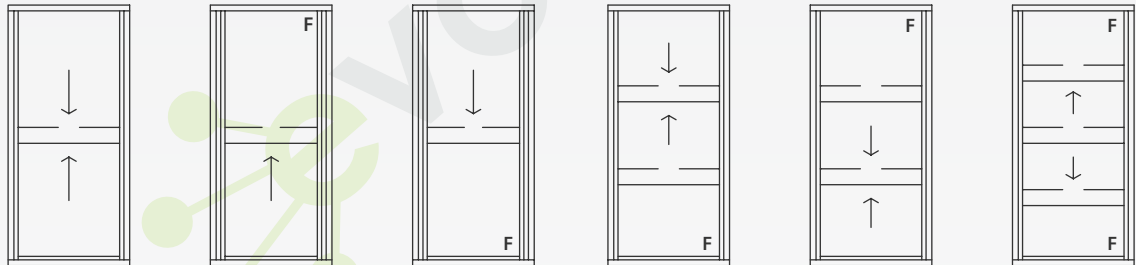

Standard 2 pane with both panes moving


Servery type with top pane fixed, bottom slides up

Servery type with bottom pane fixed, top slides down

3 pane system with bottom pane fixed

3 pane system with top pane fixed

4 pane with top and bottom panes fixed and two centre panes opening away from each other

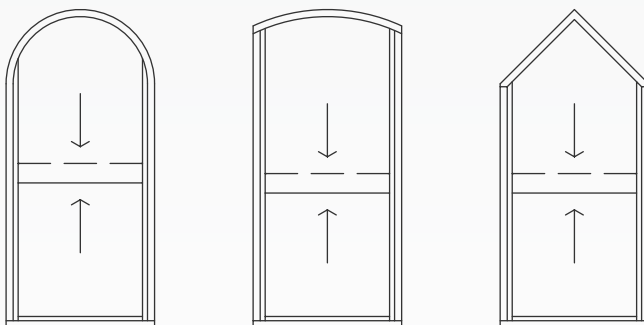

6 glass - height from 450 to 4000, width from 200 to 1200 height and widths can be increased using 10mm glass or double glazed units.

Sizes are dependent on type of glass and job location please contact Aneeta re: suitability of window size, type and application.

Minimum radius is 250mm

CONFIGURATIONS