



SLIDING WINDOW Commercial Series EV452

Key Features

17mm sliding window sashes fitted into a 102mmx44mm commercial CentreGLAZE™ frame.

Sashes can be installed, glazed or replaced from inside building, especially important in elevated situations.

Fly screens can be clipped into frame without the use of unsightly rivets, turn-buttons or brackets.

44mm nailing fin frame is standard protecting internal linings from water intrusion. Nailing fin also gives fixing point for reveal if needed accepting lugs in double brick installations.

Nailing fin sub sill comes as standard, unless alternative is requested.

Maximum sash height is 1600mm and maximum sash width is 900mm dependent on wind ratings.


Water rating up to 300Pa.

Sound rating figures approximately as follows:

- 3mm Annealed 22dB(A) RW22 (not tested)
- 6.38mm Laminated 31dB(A) RW31 (not tested)

Single glazed options: 4mm, 5mm, 6mm, 6.38mm, 6.76mm, 7.52mm and 10.38mm

Double glazed options: 18mm, 19mm and 20mm.

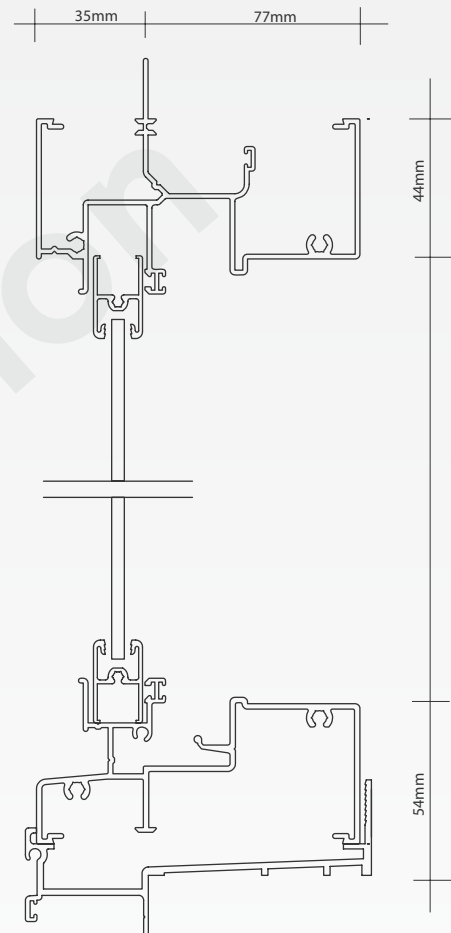

Phone Assistance
Call 02 9833 0855




Online Technical
www.evolutionwindows.com.au


SLIDING WINDOW Commercial Series EV452



DRAWINGS

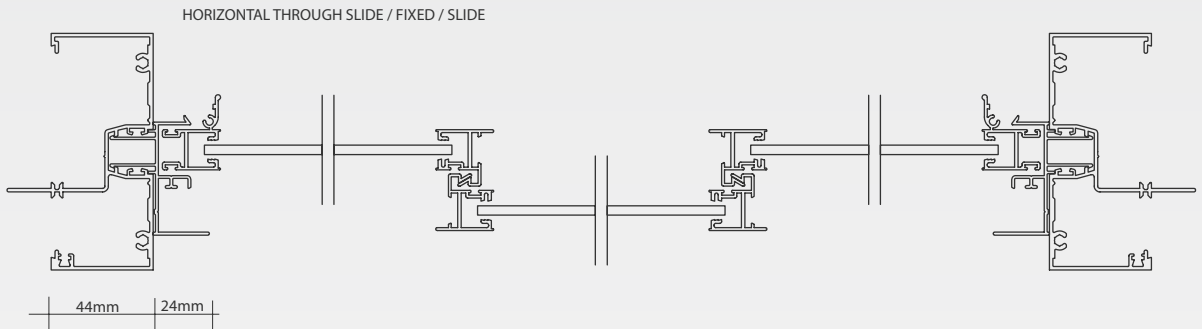

HARDWARE

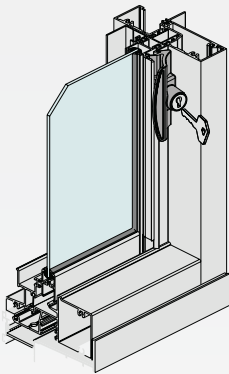

WERS

Single Glazed


Glass Type	Uw	SHGCw
6.38 VLam	6.6	0.66
6.38 CP	5.0	0.56
6 SNClr	5.4	0.49
6 EVanGry	5.2	0.34

Double Glazed

Glass Type	Uw	SHGCw
4/10/4	4.6	0.55
4 SNClr/10/4	4.2	0.42
6.38 CPClr/8 AR/4	4.0	0.45
6.38 CPGry/8/4	4.2	0.33

Some of the WERS rated glass and frame combinations for this system. For a complete list of all rated glass and frame combinations refer to our WERS chart.

Configurations available are endless and depend only on size limitations and wind loadings. Below are some of our more popular ones. **Please note - All are viewed from outside of building.**

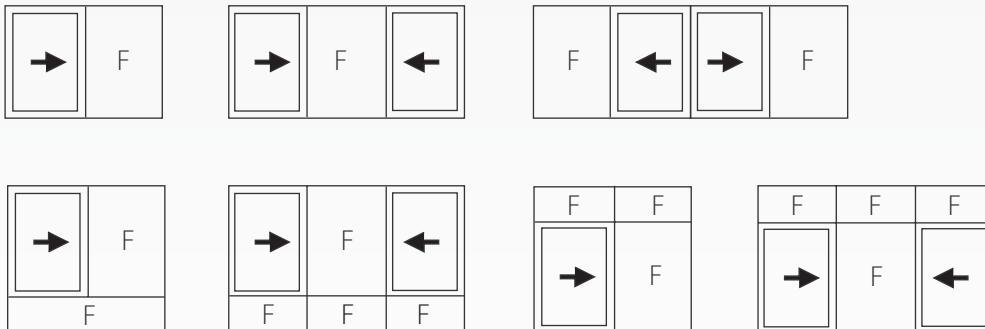

CONFIGURATIONS